



## LOOP HANGER

### Felt Lined Model 3300

**SIZE:**

1/2" thru 4" copper tube

**FINISH:**


Electro-Galvanized

**FUNCTION:**

Recommended for the suspension of stationary non-insulated copper tubing

**FEATURES:**

- Threads are countersunk so that they cannot become burred or damaged.
- Knurled swivel nut provides vertical adjustment after piping is in place.
- Complies with Federal Specification A-A-1192A (Type 10) WW-H-171-E (Type 10), ANSI/MSS SP-69 and MSS SP-58 (Type 10)

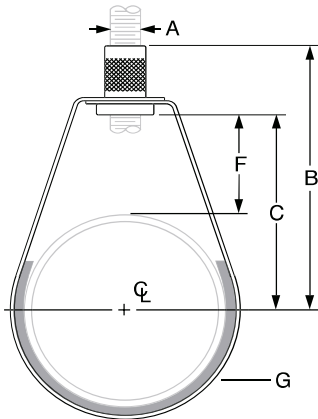

### Felt Lined Loop Hanger: Loads (LBS) • Weights (LBS) • Dimensions (IN)

| ITEM CODE<br>3300 | TUBE<br>SIZE                  | FELTED<br>HANGER<br>SIZE      | MAX<br>LOAD | WEIGHT | A<br>ROD SIZE | B                               | C                               | F                              | G<br>WIDTH |
|-------------------|-------------------------------|-------------------------------|-------------|--------|---------------|---------------------------------|---------------------------------|--------------------------------|------------|
| 3300-0050FL       | 1/2                           | 3/4                           | 300         | 0.10   | 3/8           | 2 <sup>13</sup> / <sub>16</sub> | 1 <sup>13</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub> | 5/8        |
| 3300-0075FL       | 3/4                           | 1                             | 300         | 0.10   | 3/8           | 2 <sup>5</sup> / <sub>8</sub>   | 2 <sup>1</sup> / <sub>16</sub>  | 1 <sup>5</sup> / <sub>16</sub> | 5/8        |
| 3300-0100FL       | 1                             | 1 <sup>1</sup> / <sub>4</sub> | 300         | 0.10   | 3/8           | 2 <sup>7</sup> / <sub>8</sub>   | 2 <sup>1</sup> / <sub>16</sub>  | 1 <sup>5</sup> / <sub>16</sub> | 5/8        |
| 3300-0125FL       | 1 <sup>1</sup> / <sub>4</sub> | 2                             | 300         | 0.10   | 3/8           | 2 <sup>3</sup> / <sub>4</sub>   | 1 <sup>7</sup> / <sub>8</sub>   | 1 <sup>1</sup> / <sub>16</sub> | 5/8        |
| 3300-0150FL       | 1 <sup>1</sup> / <sub>2</sub> | 2                             | 300         | 0.10   | 3/8           | 2 <sup>7</sup> / <sub>8</sub>   | 2                               | 1 <sup>1</sup> / <sub>16</sub> | 5/8        |
| 3300-0200FL       | 2                             | 2 <sup>1</sup> / <sub>2</sub> | 300         | 0.11   | 3/8           | 3 <sup>5</sup> / <sub>16</sub>  | 2 <sup>7</sup> / <sub>16</sub>  | 1 <sup>1</sup> / <sub>4</sub>  | 5/8        |
| 3300-0250FL       | 2 <sup>1</sup> / <sub>2</sub> | 3                             | 525         | 0.20   | 3/8           | 3 <sup>1</sup> / <sub>16</sub>  | 2 <sup>13</sup> / <sub>16</sub> | 1 <sup>3</sup> / <sub>8</sub>  | 3/4        |
| 3300-0300FL       | 3                             | 4                             | 525         | 0.20   | 3/8           | 3 <sup>7</sup> / <sub>8</sub>   | 3                               | 1 <sup>5</sup> / <sub>16</sub> | 3/4        |
| 3300-0400FL       | 4                             | 4                             | 650         | 0.30   | 3/8           | 4 <sup>13</sup> / <sub>16</sub> | 4                               | 1 <sup>3</sup> / <sub>4</sub>  | 3/4        |

Note: If ordering felt lined hangers for pipe sizes of 3 1/2" or under, order the next largest size to allow for the thickness of the felt lining.